



Waterproof connector



Email: JH@jhplug.com

TEL: 86-769-8768 8018

Http://www.jhplug.com

FAX: 86-769-8768 3380



地址: 广东省东莞市谢岗镇大龙村龙璧工业区三栋四楼

Production base: Floor 4, Bldg.3, Longbi Industrial Zone, Dalong, Xiegang, Dongguan

产 品 目 录 Connector Catalog 2023

深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd

东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd



Shenzhen Jiahui Industrial Co.,Ltd. (Dongguan Jiahui Intelligent Technology Co., Ltd) is a company dedicated to the Waterproof connector of the new generation of enterprises, the company is located in the design capital of the world - Shenzhen. In the process of development, we praise the integrity and professionalism, integrity can only survive in order to be more competitive and professional!

JH Waterproof connector products are widely used in various types of electronics, electrical appliances, lighting, various types of locomotives, medical, aviation and other fields. For domestic and foreign manufacturers to provide quality products and service.

JH business philosophy: IASW (Innovation, Advice, Sincere, Win-win cooperation)

深圳市嘉辉实业有限公司（东莞市嘉辉智能科技有限公司），是一家致力于防水连接器的新生代企业，公司座落在世界设计之都—深圳。在发展过程中，我们推崇诚信和敬业精神，唯有诚信经营才能更具竞争力和专业性！

JH防水连接器产品广泛应用于各类电子、电气设备、照明、各种机车、医疗、航空等领域。为国内和国外厂商提供优质的服务。

JH经营理念：IASW（创新、建议、真诚、双赢）



业务联系



Catalog PDF download
产品目录PDF档

JH 深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

地址：广东省东莞市谢岗镇大龙村龙壁工业区三栋四楼

Production base: Floor 4, Bldg.3, Longbi Industrial Zone, Dalong, Xiegang, Dongguan

Email: JH@jhplug.com


Http://www.jhplug.com

TEL: 86-769-8768 8018

FAX: 86-769-8768 3380

JH 深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd


工厂风采 Factory demeanor





深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

Certificates and Patents 证书与专利

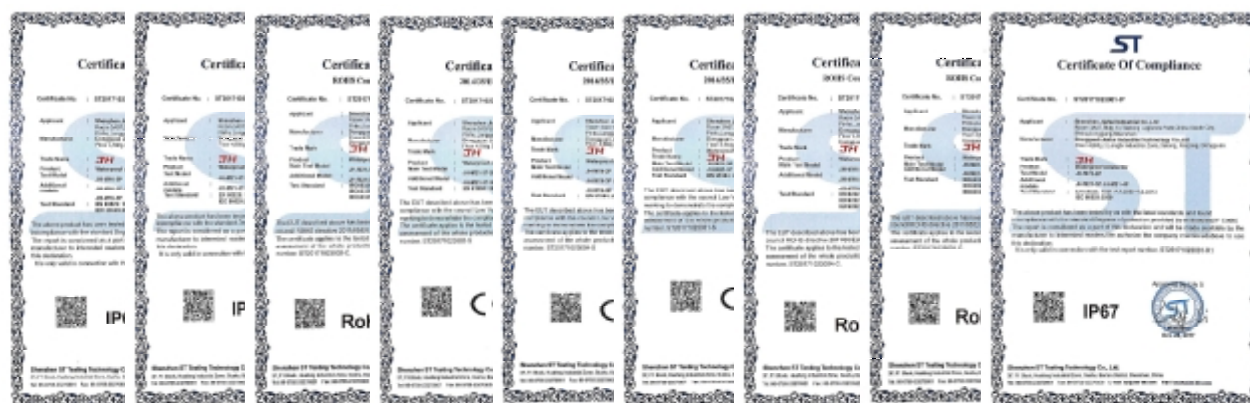


深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

Certificates and Patents 证书与专利




JH-Y series

Figure No.(图号)
JH-Y01-1P2-X
JH-Y01-1P3-X

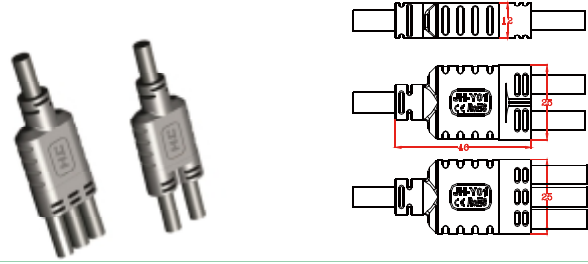


Main cable diameter : 3-8.5mm
Branch cable diameter : 3-8.5mm
主线直径 : 3-8.5mm
支线直径 : 3-8.5mm

Figure No.(图号)
JH-Y02-1P2-X
JH-Y02-1P3-X

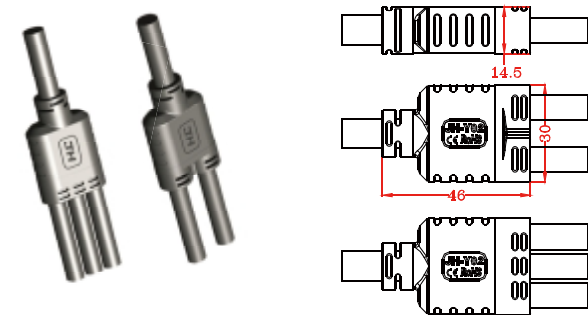


Main cable diameter : 3-11mm
Branch cable diameter : 3-10mm
主线直径 : 3-11mm
支线直径 : 3-10mm

Figure No.(图号)
JH-Y04-1P3-X
JH-Y04-1P4-X
JH-Y04-1P5-X
JH-Y04-1P6-X

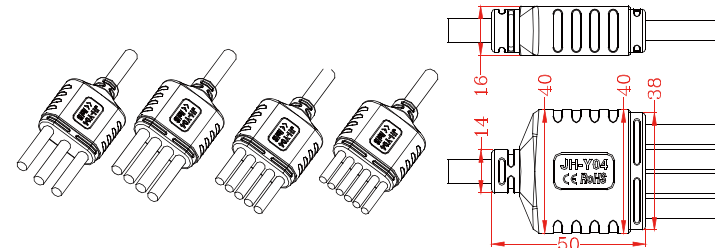


Main cable diameter : 5-11mm
Branch cable diameter : 3-11mm
主线直径 : 5-11mm
支线直径 : 3-11mm

Figure No.(图号)
JH-Y07-1P3-X
JH-Y07-1P4-X
JH-Y07-1P5-X
JH-Y07-1P6-X

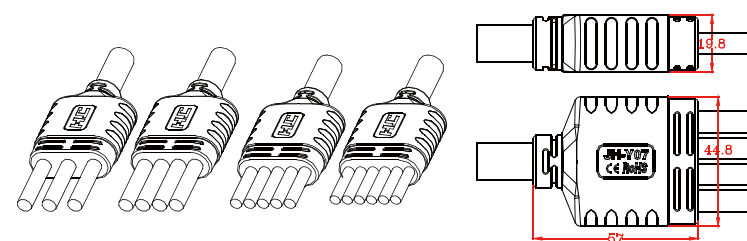

Main cable diameter : 6-14mm
Branch cable diameter : 3-12mm
主线直径 : 6-14mm
支线直径 : 3-12mm

Figure No.(图号)
JH-Y10-1P6-X
JH-Y10-1P7-X
JH-Y10-1P8-X

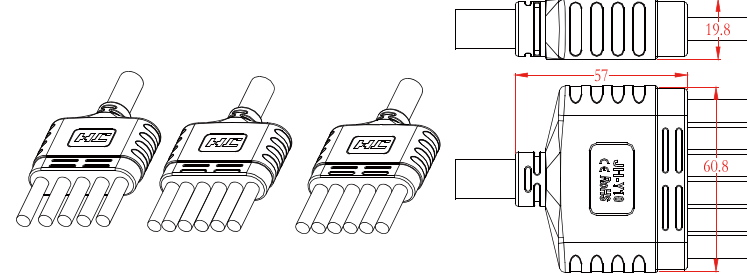


Main cable diameter : 6-14mm
Branch cable diameter : 3-12mm
主线直径 : 6-14mm
支线直径 : 3-12mm

Simple parameter description:
1. Rated voltage: Equal to rated voltage of cable
2. Rated current: equal to rated current of cable
3. Insulation voltage: Equal to insulation voltage of cable
4. Insulation resistance: 200MΩ 500V
5. Operating temperature: -40 to 105℃
6. Protection degree (IP-Code) : IP65/6/7
7: RoHS、UL94V-0、Anti-UV (UV-function)
8: lectrical connection: Can be customized
(Series or Parallel)

简要参数描述:
1. 额定电压: 按线材额定电压
2. 额定电流: 按线材额定电流
3. 耐压: 按线材耐压
4. 绝缘电阻: 200MΩ 500V
5. 使用环境温度: -40 to 105℃
6. IP等级: IP65/6/7
7: RoHS、UL94V-0、耐UV
8: 电气连接: 可定制 (串联或并联)

JH-Y series

Figure No.(图号)
JH-Y03-1Y2-X

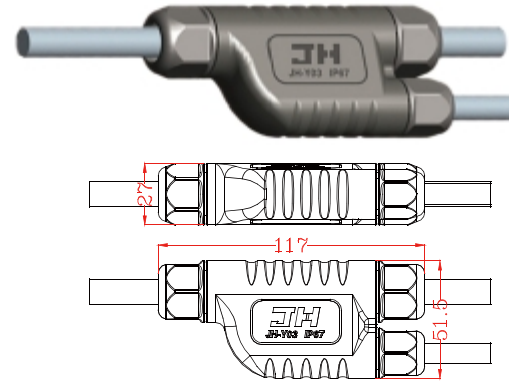

NOTES
1. Rated voltage: Equal to rated voltage of cable
2. Rated current: equal to rated current of cable
3. Insulation voltage: Equal to insulation voltage of cable
4. Insulation resistance: 500MΩ 1000V
5. Operating temperature: -40 to 105℃
6. Protection degree (IP-Code) : IP67
7: RoHS、UL94V-0、Anti-UV (UV-function)
8: Main cable diameter : 12-15mm
Branch cable diameter : 6-10mm
9: Attended mode: Welding
10: Electrical connection: Can be customized
(Series or Parallel)

参数
1. 额定电压: 按线材额定电压
2. 额定电流: 按线材额定电流
3. 耐压: 按线材耐压
4. 绝缘电阻: 500MΩ 1000V
5. 使用环境温度: -40 to 105℃
6. IP等级: IP67
7: RoHS、UL94V-0、耐UV
8: 主线直径 : 12-15mm
支线直径 : 6-10mm
9: 焊接方式: 焊线
10: 电气连接: 可定制 (串联或并联)



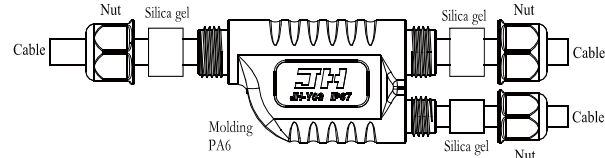


Figure No.(图号)
JH-Y05-1Y2-X

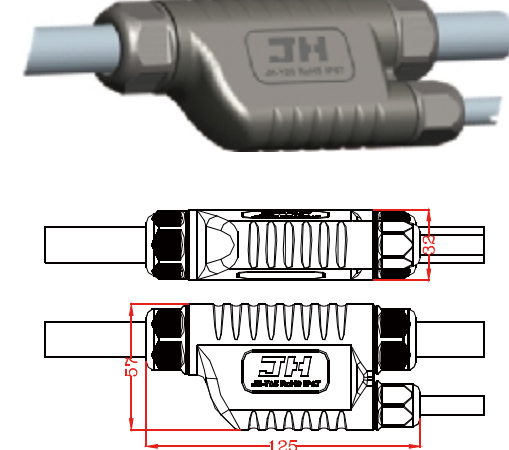


NOTES
1. Rated voltage: Equal to rated voltage of cable
2. Rated current: equal to rated current of cable
3. Insulation voltage: Equal to insulation voltage of cable
4. Insulation resistance: 500MΩ 1000V
5. Operating temperature: -40 to 105℃
6. Protection degree (IP-Code) : IP67
7: RoHS、UL94V-0、Anti-UV (UV-function)
8: Main cable diameter : 14-18mm
Branch cable diameter : 6-10mm
9: Attended mode: Welding
10: Electrical connection: Can be customized
(Series or Parallel)

参数
1. 额定电压: 按线材额定电压
2. 额定电流: 按线材额定电流
3. 耐压: 按线材耐压
4. 绝缘电阻: 500MΩ 1000V
5. 使用环境温度: -40 to 105℃
6. IP等级: IP67
7: RoHS、UL94V-0、耐UV
8: 主线直径 : 14-18mm
支线直径 : 6-10mm
9: 焊接方式: 焊线
10: 电气连接: 可定制 (串联或并联)

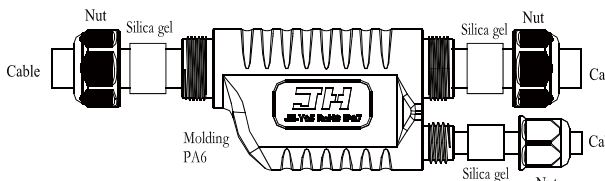


Customized (定制类连接方式)

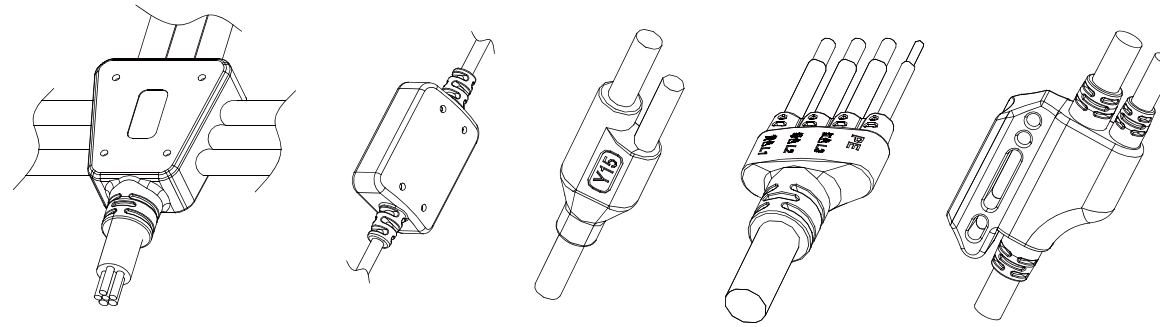

JH-T series

Figure No.(图号)
JH-T01

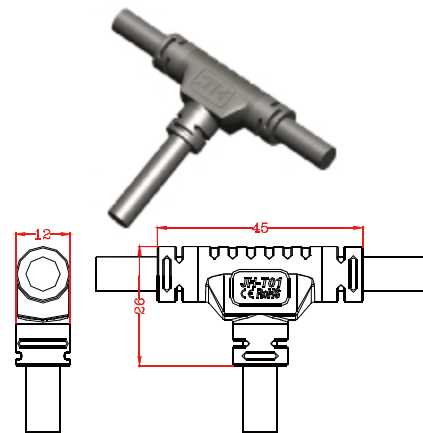


NOTES

- 1. Rated voltage: Equal to rated voltage of cable
- 2. Rated current: equal to rated current of cable
- 3. Insulation voltage: Equal to insulation voltage of cable
- 4. Insulation resistance: 200MΩ 500V
- 5. Operating temperature: -40 to 105℃
- 6. Protection degree (IP-Code) : IP65/6/7
- 7: RoHS、UL94V-0、Anti-UV (UV-function)
- 8: Main cable diameter : 4-8.5mm
Branch cable diameter : 3-8.5mm
- 9: Attended mode: Welding or Welded PCB board
- 10: Electrical connection: Can be customized (Series or Parallel)

参数

- 1. 额定电压: 按线材额定电压
- 2. 额定电流: 按线材额定电流
- 3. 耐压: 按线材耐压
- 4. 绝缘电阻: 200MΩ 500V
- 5. 使用环境温度: -40 to 105℃
- 6. IP等级: IP65/6/7
- 7: RoHS、UL94V-0、耐UV
- 8: 主线直径: 4-8.5mm
支线直径: 3-8.5mm
- 9: 焊接方式: 焊线或焊PCB
- 10: 电气连接: 可定制 (串联或并联)

Figure No.(图号)
JH-T02

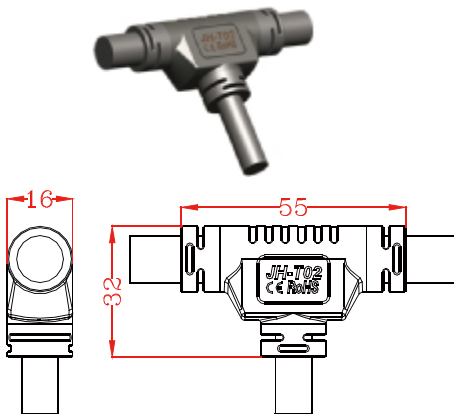

NOTES


- 1. Rated voltage: Equal to rated voltage of cable
- 2. Rated current: equal to rated current of cable
- 3. Insulation voltage: Equal to insulation voltage of cable
- 4. Insulation resistance: 200MΩ 500V
- 5. Operating temperature: -40 to 105℃
- 6. Protection degree (IP-Code) : IP65/6/7
- 7: RoHS、UL94V-0、Anti-UV (UV-function)
- 8: Main cable diameter : 7-11mm
Branch cable diameter : 6-11mm
- 9: Attended mode: Welding or Welded PCB board
- 10: Electrical connection: Can be customized (Series or Parallel)

参数

- 1. 额定电压: 按线材额定电压
- 2. 额定电流: 按线材额定电流
- 3. 耐压: 按线材耐压
- 4. 绝缘电阻: 200MΩ 500V
- 5. 使用环境温度: -40 to 105℃
- 6. IP等级: IP65/6/7
- 7: RoHS、UL94V-0、耐UV
- 8: 主线直径: 7-11mm
支线直径: 6-11mm
- 9: 焊接方式: 焊线或焊PCB
- 10: 电气连接: 可定制 (串联或并联)

JH-T series

Figure No.(图号)
JH-T05

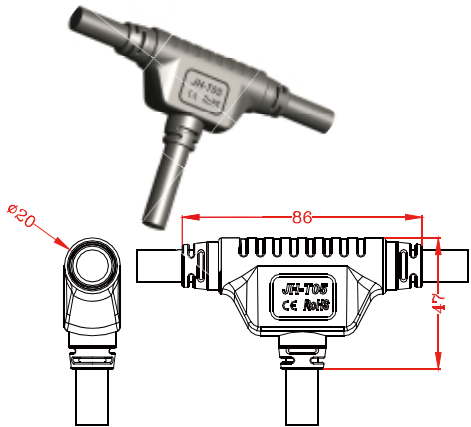


NOTES

- 1. Rated voltage: Equal to rated voltage of cable
- 2. Rated current: equal to rated current of cable
- 3. Insulation voltage: Equal to insulation voltage of cable
- 4. Insulation resistance: 500MΩ 1000V
- 5. Operating temperature: -40 to 105℃
- 6. Protection degree (IP-Code) : IP65/6/7
- 7: RoHS、UL94V-0、Anti-UV (UV-function)
- 8: Main cable diameter : 5-10mm
Branch cable diameter : 5-10mm
- 9: Attended mode: Welding
- 10: Electrical connection: Can be customized (Series or Parallel)

参数

- 1. 额定电压: 按线材额定电压
- 2. 额定电流: 按线材额定电流
- 3. 耐压: 按线材耐压
- 4. 绝缘电阻: 500MΩ 1000V
- 5. 使用环境温度: -40 to 105℃
- 6. IP等级: IP65/6/7
- 7: RoHS、UL94V-0、耐UV
- 8: 主线直径: 5-10mm
支线直径: 5-10mm
- 9: 焊接方式: 焊线
- 10: 电气连接: 可定制 (串联或并联)

Figure No.(图号)
JH-T06

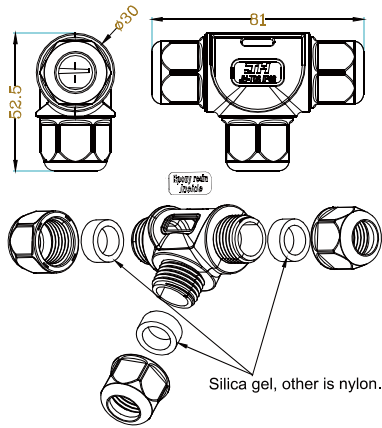


NOTES

- 1. Rated voltage: Equal to rated voltage of cable
- 2. Rated current: equal to rated current of cable
- 3. Insulation voltage: Equal to insulation voltage of cable
- 4. Insulation resistance: 200MΩ 500V
- 5. Operating temperature: -40 to 105℃
- 6. Protection degree (IP-Code) : IP67
- 7: RoHS、UL94V-0、Anti-UV (UV-function)
- 8: Main cable diameter : 5-12mm
Branch cable diameter : 5-12mm
- 9: Attended mode: Welding or Welded PCB board
- 10: Electrical connection: Can be customized (Series or Parallel)

参数


- 1. 额定电压: 按线材额定电压
- 2. 额定电流: 按线材额定电流
- 3. 耐压: 按线材耐压
- 4. 绝缘电阻: 200MΩ 500V
- 5. 使用环境温度: -40 to 105℃
- 6. IP等级: IP67
- 7: RoHS、UL94V-0、耐UV
- 8: 主线直径: 5-12mm
支线直径: 5-12mm
- 9: 焊接方式: 焊线或焊PCB
- 10: 电气连接: 可定制 (串联或并联)

JH-L21 series

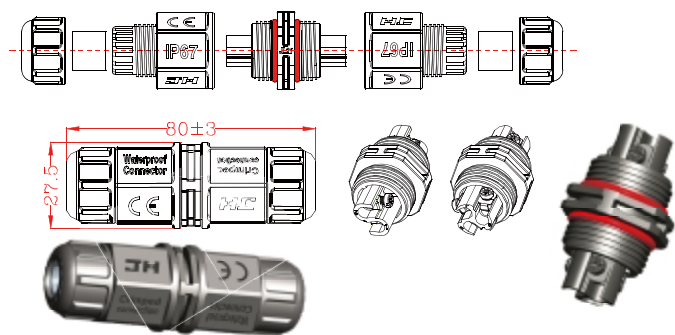

JH-M21-FLF


Figure No.(图号)
JH-M21-FLF01-2S-X
JH-M21-FLF01-3S-X

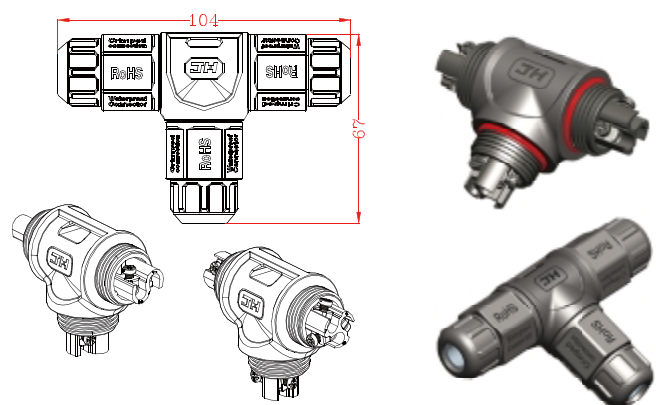

JH-M21-FTF

Figure No.(图号)
Parallel circuit (并联)
JH-M21-FTF01-2S-X
JH-M21-FTF01-3S-X

Series circuit (串联)
JH-M21-FTF02-2S-X
JH-M21-FTF02-3S-X

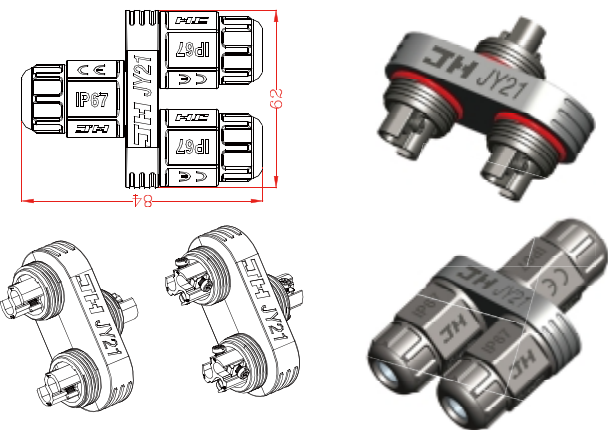

JH-M21-FYF


Figure No.(图号)
Parallel circuit (并联)
JH-M21-FYF01-2S-X
JH-M21-FYF01-3S-X

Series circuit (串联)
JH-M21-FYF02-2S-X
JH-M21-FYF02-3S-X

Simple parameter description:
Rated voltage & current: 500V DC/AC 25A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃
Assembly cable diameter: 4 ~10.5mm

简要参数描述:
额定电压及电流: 500V DC/AC 25A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 4~10.5mm

JH-L21 series

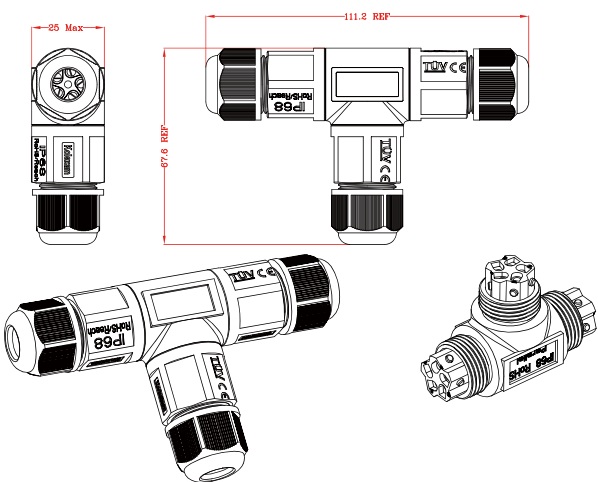


JH-PDA-FTF

Figure No.(图号)
Parallel circuit (并联)
JH-PDA-FTF01-4S-X
JH-PDA-FTF01-5S-X

Simple parameter description:
Rated voltage & current:
300V/20A, IP67
Assembly cable diameter:
5.5~8mm

简要参数描述:
额定电压及电流:
300V/20A, IP67
装配电缆直径:
6~10mm

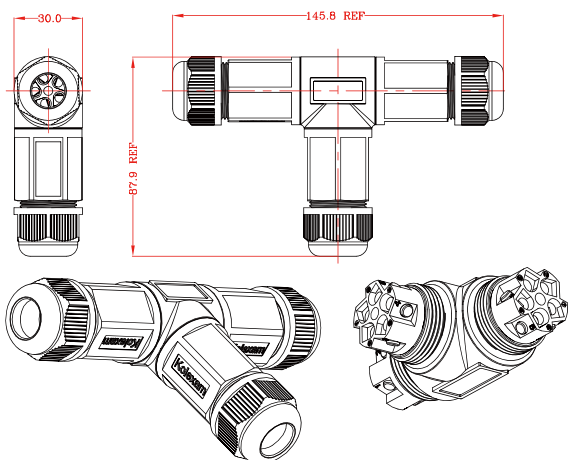


JH-PDA-L-FTF

Figure No.(图号)
Parallel circuit (并联)
JH-PDA-L-FTF01-4S-X
JH-PDA-L-FTF01-5S-X

Simple parameter description:
Rated voltage & current:
300V/20A, IP67
Assembly cable diameter:
5.5~8mm

简要参数描述:
额定电压及电流:
300V/40A, IP67
装配电缆直径:
10~14.5mm

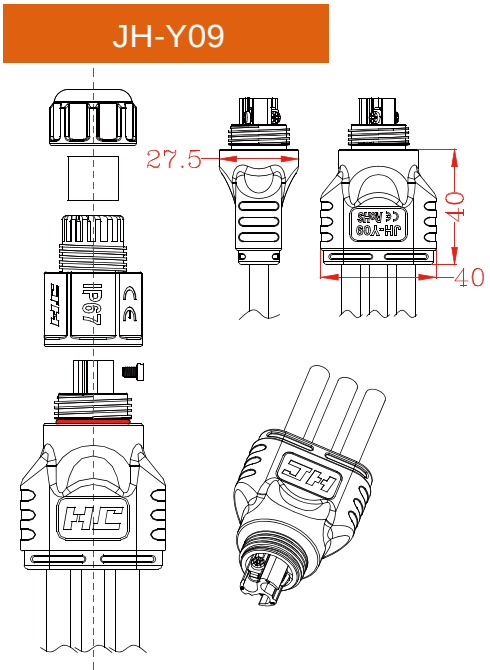

JH-Y09

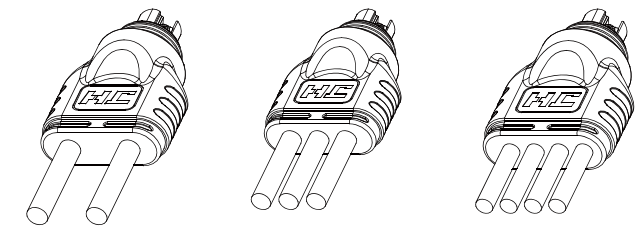


Figure No.(图号)
JH-Y09-1Y2-2S-X
JH-Y09-1Y2-3S-X


Figure No.(图号)
JH-Y09-1Y3-2S-X
JH-Y09-1Y3-3S-X

Figure No.(图号)
JH-Y09-1Y4-2S-X
JH-Y09-1Y4-3S-X

Simple parameter description:
Rated voltage & current: Refer to wire specification
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃
Assembly cable diameter: 4 ~10.5mm

简要参数描述:
额定电压及电流: 参考线材规格
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 4~10.5mm

JH-KJ series

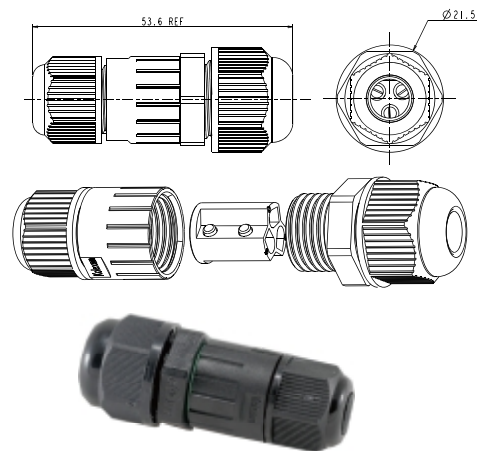


JH-KJ-PG9-07

Figure No.(图号)
JH-KJ-PG9-07-2S
JH-KJ-PG9-07-3S

Simple parameter description:
Rated voltage & current:
300V/20A, IP67
Assembly cable diameter:
5.5~8mm

简要参数描述:
额定电压及电流:
300V/20A, IP67
装配电缆直径:
5.5~8mm

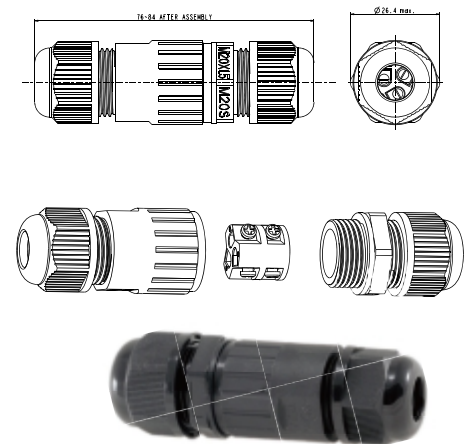


JH-KJ-M20S-11

Figure No.(图号)
JH-KJ-M20S-11-2S
JH-KJ-M20S-11-3S
JH-KJ-M20S-11-4S
JH-KJ-M20S-11-5S
JH-KJ-M20S-11-6S

Simple parameter description:
Rated voltage & current:
450V/20A, IP67
Assembly cable diameter:
7~10.5mm

简要参数描述:
额定电压及电流:
450V/20A, IP67
装配电缆直径:
7~10.5mm

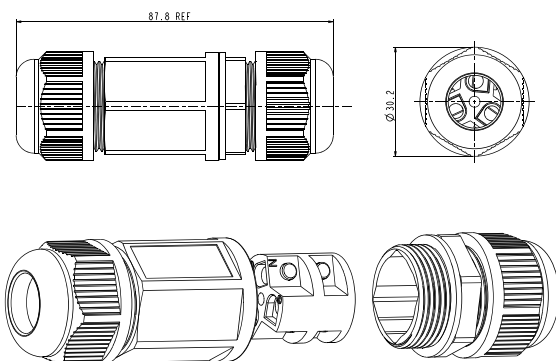


JH-KJ-M25S-14

Figure No.(图号)
JH-KJ-M25S-14-2S
JH-KJ-M25S-14-3S
JH-KJ-M25S-14-4S
JH-KJ-M25S-14-5S
JH-KJ-M25S-14-6S
JH-KJ-M25S-14-8S

Simple parameter description:
Rated voltage & current:
2/3/4/5: 600V/40A, IP67
6/8: 400V/20A, IP67
Assembly cable diameter:
10~14.5mm

简要参数描述:
额定电压及电流:
2/3/4/5: 600V/40A, IP67
6/8: 400V/20A, IP67
装配电缆直径:
10~14.5mm

JH-KJ series

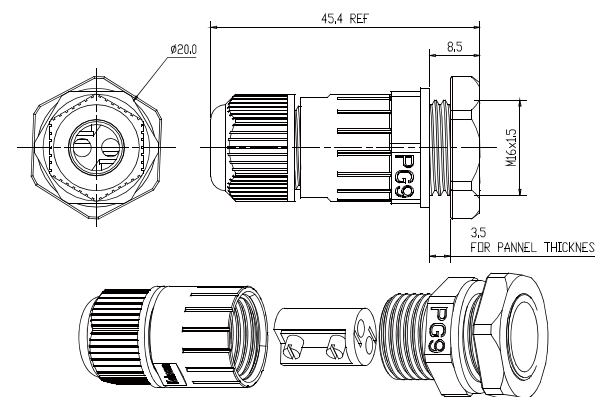


JH-KJP-PG9-07

Figure No.(图号)
JH-KJP-PG9-07-2S
JH-KJP-PG9-07-3S

Simple parameter description:
Rated voltage & current:
300V/20A, IP67
Assembly cable diameter:
5.5~8mm

简要参数描述:
额定电压及电流:
300V/20A, IP67
装配电缆直径:
5.5~8mm

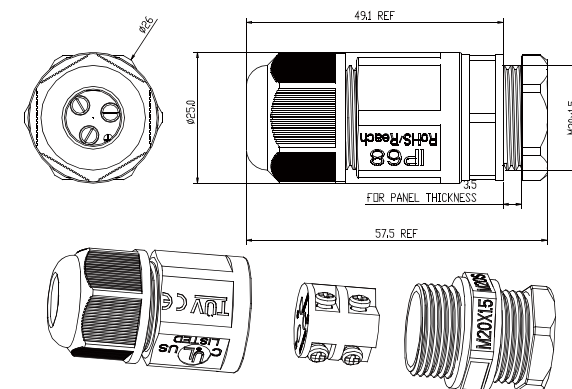

JH-KJP-M20S-11

Figure No.(图号)
JH-KJP-M20S-11-2S
JH-KJP-M20S-11-3S
JH-KJP-M20S-11-4S
JH-KJP-M20S-11-5S
JH-KJP-M20S-11-6S

Simple parameter description:
Rated voltage & current:
450V/20A, IP67
Assembly cable diameter:
7~10.5mm

简要参数描述:
额定电压及电流:
450V/20A, IP67
装配电缆直径:
7~10.5mm

Cable tail waterproof seal（电缆尾部防水密封）

JH-KJ16-DT


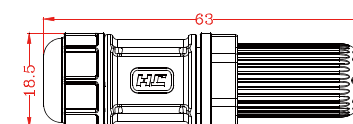


Figure No.(图号)
JH-KJ16-DT

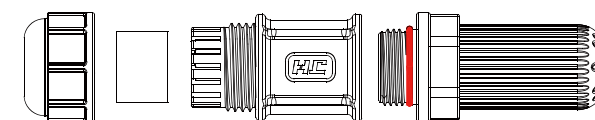

IP67/68
Assembly cable diameter（装配电缆直径）：
3~9.2mm

JH-KJ21-DT






Figure No.(图号)
JH-KJ21-DT

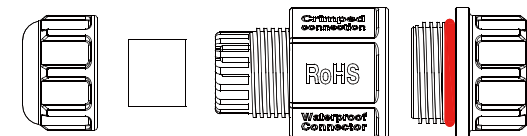

IP67/68
Assembly cable diameter（装配电缆直径）：
4~10.5mm


JH-26 series

Figure No.(图号)
JH-M26-FLF-6S

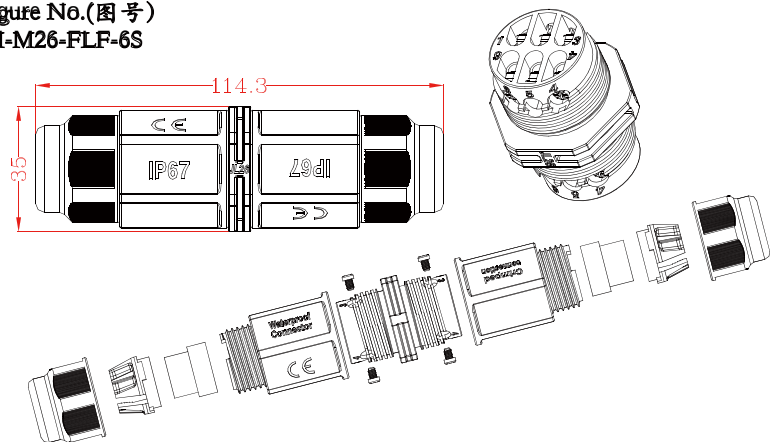


Simple parameter description:
Rated voltage & current: 500V DC/AC 30A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105℃
Assembly cable diameter: 4 ~ 10.5mm

Figure No.(图号)
JH-M26-FLF-2S-X
JH-M26-FLF-3S-X

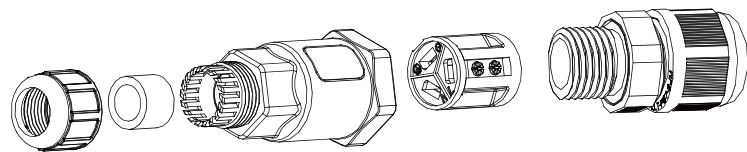

简要参数描述:
额定电压及电流: 500V DC/AC 30A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105℃
装配电缆直径: 4 ~ 10.5mm

Figure No.(图号)
JH-M26-1T2-2S-X
JH-M26-1T2-3S-X

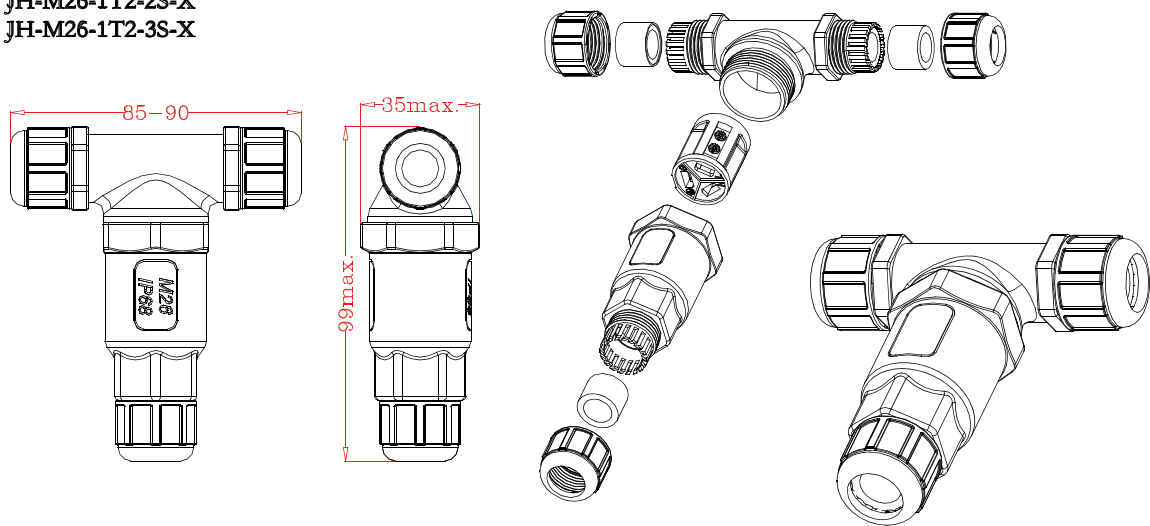

P54

JH-JSQ series

Water interceptor (截水器)

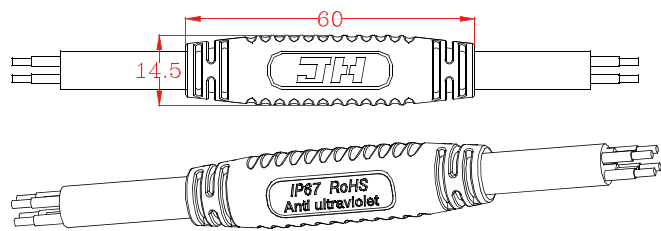


Figure No.(图号)
JH-JSQ-A-2P
JH-JSQ-A-3P
JH-JSQ-A-4P
JH-JSQ-A-5P
JH-JSQ-A-6P

Values for cable clamp: 3 ~ 8.5mm
电缆直径: 3 ~ 8.5mm

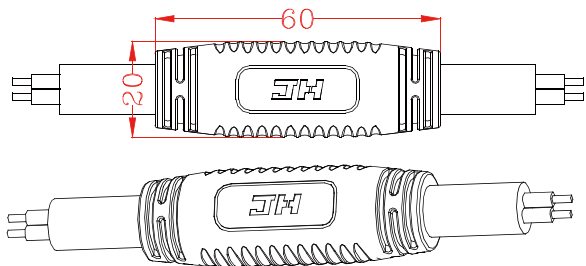


Figure No.(图号)
JH-JSQ-B-2P
JH-JSQ-B-3P
JH-JSQ-B-4P
JH-JSQ-B-5P
JH-JSQ-B-6P

Values for cable clamp: 8 ~ 12mm
电缆直径: 8 ~ 12mm

Simple parameter description:
1. Rated voltage: Refer to wire specification
2. Rated current: Refer to wire specification
3. Insulation voltage: Refer to wire specification
4. Insulation resistance: Refer to wire specification
5. Operating temperature: -40 to 105℃
6. Protection degree (IP-Code): IP67 IP68
7. RoHS, UL94V-0, Anti-UV (UV-function)

简单参数描述:
1. 额定电压: 参考导线规格
2. 额定电流: 参考导线规格
3. 绝缘电压: 参考导线规格
4. 绝缘电阻: 参考导线规格
5. 工作温度: -40至105℃
6. 防护等级 (IP代码): IP67 IP68
7. RoHS、UL94V-0、防紫外线 (UV)



Underground lamp Water interceptor
Water tank Water interceptor
地埋灯截水器、水箱截水器