




Waterproof connector



Email: JH@jhplug.com
TEL: 86-769-8768 8018
Http://www.jhplug.com
FAX: 86-769-8768 3380

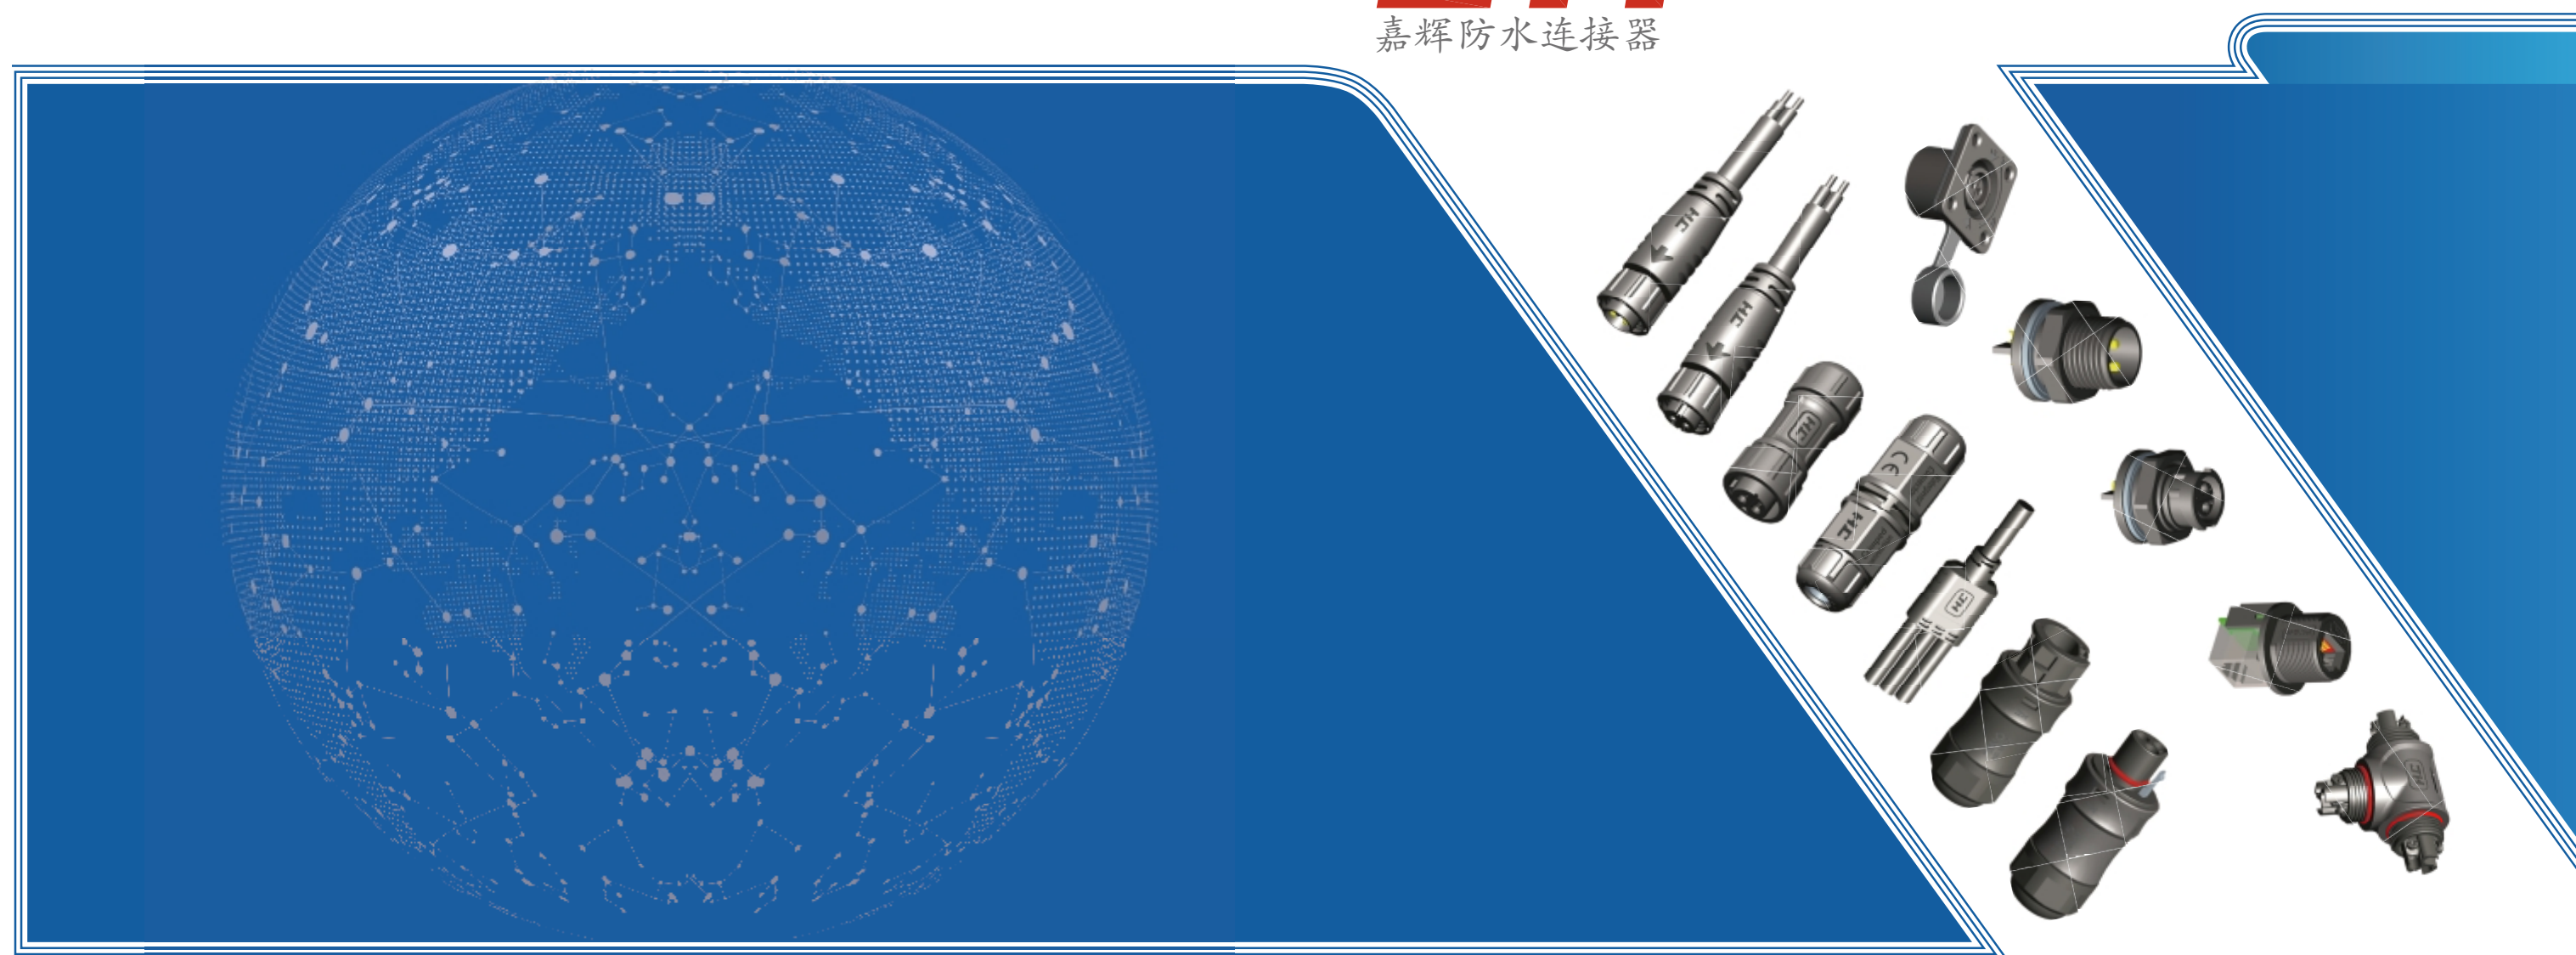

地址: 广东省东莞市谢岗镇大龙村龙璧工业区三栋四楼
Production base: Floor 4, Bldg.3, Longbi Industrial Zone, Dalong, Xiegang, Dongguan

产 品 目 录 Connector Catalog 2023

深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd



Shenzhen Jiahui Industrial Co.,Ltd. (Dongguan Jiahui Intelligent Technology Co., Ltd) is a company dedicated to the Waterproof connector of the new generation of enterprises, the company is located in the design capital of the world - Shenzhen. In the process of development, we praise the integrity and professionalism, integrity can only survive in order to be more competitive and professional!

JH Waterproof connector products are widely used in various types of electronics, electrical appliances, lighting, various types of locomotives, medical, aviation and other fields. For domestic and foreign manufacturers to provide quality products and service.

JH business philosophy: IASW (Innovation, Advice, Sincere, Win-win cooperation)

深圳市嘉辉实业有限公司（东莞市嘉辉智能科技有限公司），是一家致力于防水连接器的新生代企业，公司座落在世界设计之都—深圳。在发展过程中，我们推崇诚信和敬业精神，唯有诚信经营才能更具竞争力和专业性！

JH防水连接器产品广泛应用于各类电子、电气设备、照明、各种机车、医疗、航空等领域。为国内和国外厂商提供优质的服务。

JH经营理念：IASW（创新、建议、真诚、双赢）



业务联系



Catalog PDF download
产品目录PDF档

JH 深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

地址：广东省东莞市谢岗镇大龙村龙壁工业区三栋四楼

Production base: Floor 4, Bldg.3, Longbi Industrial Zone, Dalong, Xiegang, Dongguan

Email: JH@jhplug.com


Http://www.jhplug.com

TEL: 86-769-8768 8018

FAX: 86-769-8768 3380

JH 深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd


工厂风采 Factory demeanor





深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

Certificates and Patents 证书与专利

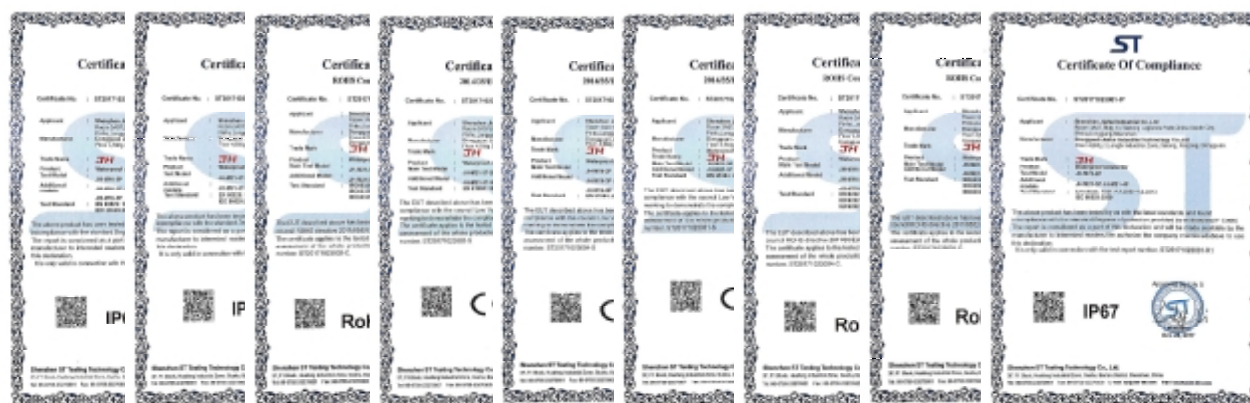

深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

Certificates and Patents 证书与专利

QUALITY MANAGEMENT SYSTEM CERTIFICATE
Certificate No: 38822Q46T17K35
This is to certify that:
Dongguan Jiahui Intelligent Technology Co., Ltd.
Unified Social Code: 91441903MA4W0PYC6D
Registered Address/Business Address:
4th Floor, Building 3, Longbi Industrial Zone, Liangmaogang,
Dalong Village, Xiegang Town, Dongguan City.
has been evaluated meeting the requirements of
GB/T 19001-2016 / ISO 9001:2015
The certification scope is as follows:
Design and production of industrial connectors and cables.
Issue Date: Dec.27.2022
Expiry Date: Dec.26.2025
Authorized Signature: [Signature]
[Stamp: Shenzhen Huayu International Certification Co., Ltd.]
[Stamp: HY-IC] [Stamp: EN]

质量管理体系认证证书
证书编号: 38822Q46T17K35
颁证机构:
东莞市嘉辉智能科技有限公司
统一社会信用代码: 91441903MA4W0PYC6D
注册/经营地址: 东莞市谢岗镇大龙村凉帽岗工业区内3栋4楼
所建立的质量管理体系符合
GB/T 19001-2016 / ISO 9001:2015
通过认证范围如下:
工业连接器和连接线的设计和生产
发证日期: 2022年12月27日
有效期至: 2025年12月26日
授权人: [Signature]
[Stamp: Shenzhen Huayu International Certification Co., Ltd.]
[Stamp: HY-IC] [Stamp: EN]

intertek
Total Quality. Assured.

AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listed model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Dongguan Jiahui Intelligent Technology Co., Ltd. Address: 4th Floor, Building 3, Liangbi Industrial Zone, Liangmaogang, Dalong Village, Xiegang Town, Dongguan, Guangdong, 523602 Country: China Contact: Zhou Qiang Phone: 86-13923475279 FAX: - Email: jh@jhpkg.com	Manufacturer: Dongguan Jiahui Intelligent Technology Co., Ltd. Address: 4th Floor, Building 3, Liangbi Industrial Zone, Liangmaogang, Dalong Village, Xiegang Town, Dongguan, Guangdong, 523602 Country: China Contact: Zhou Qiang Phone: 86-13923475279 FAX: - Email: jh@jhpkg.com
---	--

Party Authorized To Apply Mark: Same as Manufacturer
Report Issuing Office: Intertek Testing Services Shanghai
Control Number: 5016071
Authorized by: [Signature]
for L. Matthew Snyder, Certification Manager

This document supersedes all previous Authorizations to Mark for the model listed herein.

intertek
Total Quality. Assured.

AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listed model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

Applicant: Dongguan Jiahui Intelligent Technology Co., Ltd. Address: 4th Floor, Building 3, Liangbi Industrial Zone, Liangmaogang, Dalong Village, Xiegang Town, Dongguan, Guangdong, 523602 Country: China Contact: Zhou Qiang Phone: 86-13923475279 FAX: - Email: jh@jhpkg.com	Manufacturer: Dongguan Jiahui Intelligent Technology Co., Ltd. Address: 4th Floor, Building 3, Liangbi Industrial Zone, Liangmaogang, Dalong Village, Xiegang Town, Dongguan, Guangdong, 523602 Country: China Contact: Zhou Qiang Phone: 86-13923475279 FAX: - Email: jh@jhpkg.com
---	--

Party Authorized To Apply Mark: Same as Manufacturer
Report Issuing Office: Intertek Testing Services Shanghai
Control Number: 5016071
Authorized by: [Signature]
for L. Matthew Snyder, Certification Manager

This document supersedes all previous Authorizations to Mark for the model listed herein.



深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

JH - M 12 - F D M 0 1 - 2 P - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

JH series naming rules

- ① M: Thread / Q: Quick / F: Flange / S: Other stucture
- ② 12: 12 Series / 16: 16 Series / 20: 20 Series / 24: 24 Series
- ③ F: Socket without docking nut / M: Plug with docking nut
- ④ D: Docking / P: Panel / F: Front panel / R: Rear panel
- ⑤ F: Female PIN / M: Male PIN / C: Waterproof cover
- ⑥ 0: Field assemble / 1: Molded with cable / Other: Customized
- ⑦ Distinguishing code
- ⑧ Pins number / A+B: Large+small pin
- ⑨ P: Solder / B: PCB welding / C: Crimped connection / S: Screw connection / Other: Customized
- ⑩ Refer to detailed drawings

JH 系列命名规则


- ① M: 螺纹 / Q: 快卡 / F: 法兰 / S: 其它结构零件
- ② 12: 12系列 / 16: 16系列 / 20: 20系列 / 24: 24系列
- ③ F: 插座端不带对接螺帽 / M: 插头端带对接螺帽
- ④ D: 对接式 / P: 面板式 / F: 前装面板 / R: 后装面板
- ⑤ F: 母针 / M: 公针 / C: 防水盖板
- ⑥ 0: 组装式 / 1: 注塑包胶 / Other: 客户定制
- ⑦ 识别码
- ⑧ Pin 数 / A+B: 大五金+小五金
- ⑨ P: 焊锡 / B: 焊板 / C: 铆压 / S: 螺丝压接 / Other: 定制
- ⑩ 标识代码, 参考详细图纸

Plug(插头端)


Different series for your choice:
1:Male PIN or female pin;
2:Thread docking or quick docking.

可选择不同系列
1: 公针或母针;
2: 螺纹对接或快卡对接。

螺纹对接
Thread nut



快卡对接
Quick nut



Socket (插座端)

Different series for your choice:
1:Male PIN or female pin;
2:Thread docking or quick docking;
3:Front panel or rear panel or flange.

可选择不同系列
1: 公针或母针;
2: 螺纹对接或快卡对接;
3: 前装面板或后装面板或法兰安装。




深圳市嘉辉实业有限公司
东莞市嘉辉智能科技有限公司

[Http://www.jhplug.com](http://www.jhplug.com) [Http://www.jhsocket.com](http://www.jhsocket.com)

JH-12 series

Plug with female PIN (母针插头)

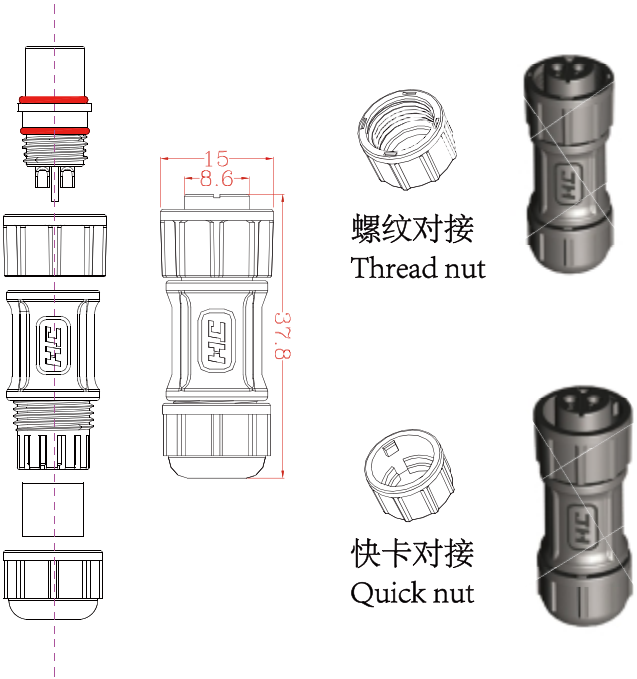

螺纹对接
Thread nut

快卡对接
Quick nut

JH-M12-MDF01

Figure No.(图号)
JH-M12-MDF01-2P-X
JH-M12-MDF01-3P-X
JH-M12-MDF01-4P-X
JH-M12-MDF01-2+3P-X
JH-M12-MDF01-6P-X
JH-M12-MDF01-8P-X


JH-Q12-MDF01

Figure No.(图号)
JH-Q12-MDF01-2P-X
JH-Q12-MDF01-3P-X
JH-Q12-MDF01-4P-X
JH-Q12-MDF01-2+3P-X
JH-Q12-MDF01-6P-X
JH-Q12-MDF01-8P-X

PIN layout
(插针排列)



Plug with male PIN (公针插头)

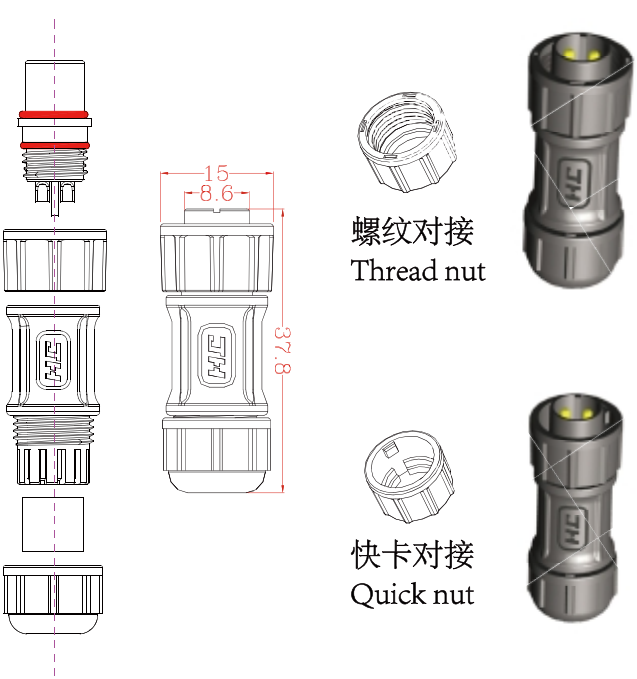

螺纹对接
Thread nut

快卡对接
Quick nut


JH-M12-MDM01

Figure No.(图号)
JH-M12-MDM01-2P-X
JH-M12-MDM01-3P-X
JH-M12-MDM01-4P-X
JH-M12-MDM01-5P-X
JH-M12-MDM01-8P-X

JH-Q12-MDM01

Figure No.(图号)
JH-Q12-MDM01-2P-X
JH-Q12-MDM01-3P-X
JH-Q12-MDM01-4P-X
JH-Q12-MDM01-5P-X
JH-Q12-MDM01-8P-X

PIN layout
(插针排列)




Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / IP68
Operating temperature: -40 ~105℃
Assembly cable diameter: 3~6.5mm

简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / IP68
工作温度: -40 ~105℃
装配电缆直径: 3~6.5mm

JH-12 series

Docking socket with male PIN (公针对接插座)

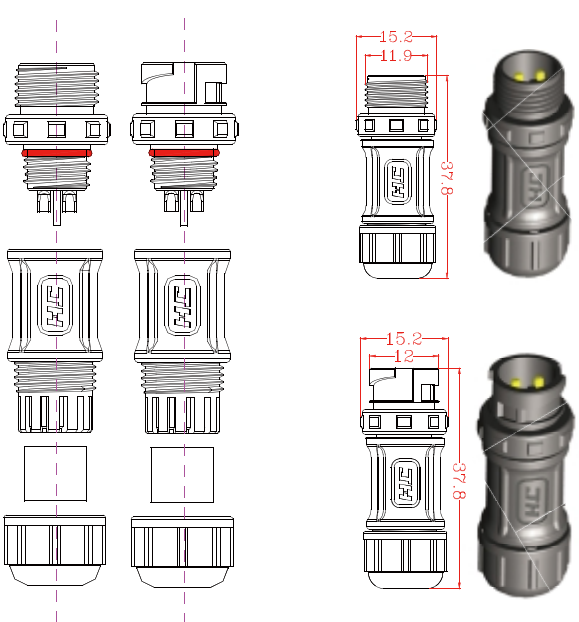

JH-M12-FDM01

Figure No.(图号)
JH-M12-FDM01-2P-X
JH-M12-FDM01-3P-X
JH-M12-FDM01-4P-X
JH-M12-FDM01-2+3P-X
JH-M12-FDM01-6P-X
JH-M12-FDM01-8P-X


JH-Q12-FDM01

Figure No.(图号)
JH-Q12-FDM01-2P-X
JH-Q12-FDM01-3P-X
JH-Q12-FDM01-4P-X
JH-Q12-FDM01-2+3P-X
JH-Q12-FDM01-6P-X
JH-Q12-FDM01-8P-X

PIN layout
(插针排列)



Docking socket with female PIN (母针对接插座)

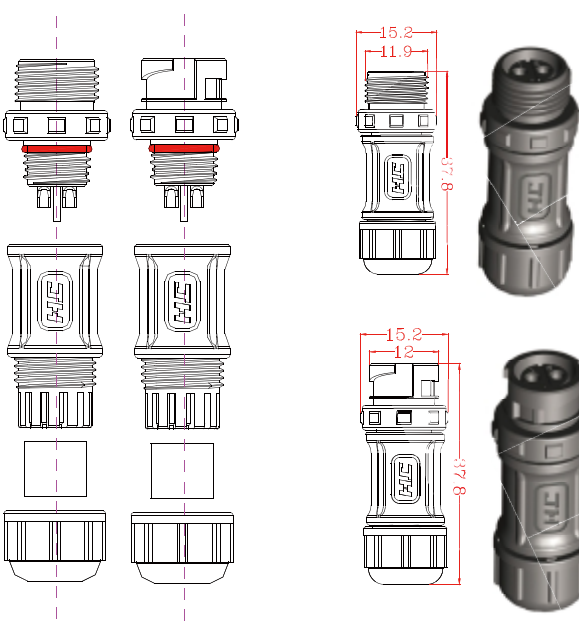


JH-M12-FDF01

Figure No.(图号)
JH-M12-FDF01-2P-X
JH-M12-FDF01-3P-X
JH-M12-FDF01-4P-X
JH-M12-FDF01-5P-X
JH-M12-FDF01-8P-X

JH-Q12-FDF01

Figure No.(图号)
JH-Q12-FDF01-2P-X
JH-Q12-FDF01-3P-X
JH-Q12-FDF01-4P-X
JH-Q12-FDF01-5P-X
JH-Q12-FDF01-8P-X

PIN layout
(插针排列)




Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / IP68
Operating temperature: -40 ~105℃
Assembly cable diameter: 3~6.5mm

简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / IP68
工作温度: -40 ~105℃
装配电缆直径: 3~6.5mm

JH-12 series


Plug with female PIN - Molding (母针插头-成型)

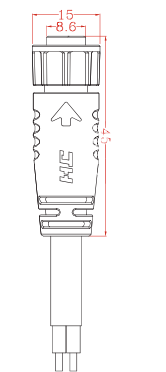

螺纹对接
Thread nut



快卡对接
Quick nut



螺纹对接
Thread nut



快卡对接
Quick nut

JH-M12-MDF11

Figure No.(图号)
JH-M12-MDF11-2P-X
JH-M12-MDF11-3P-X
JH-M12-MDF11-4P-X
JH-M12-MDF11-2+3P-X
JH-M12-MDF11-6P-X
JH-M12-MDF11-8P-X

JH-Q12-MDF11

Figure No.(图号)
JH-Q12-MDF11-2P-X
JH-Q12-MDF11-3P-X
JH-Q12-MDF11-4P-X
JH-Q12-MDF11-2+3P-X
JH-Q12-MDF11-6P-X
JH-Q12-MDF11-8P-X


JH-M12-MDF11-WT

Figure No.(图号)
JH-M12-MDF11-2P-WT
JH-M12-MDF11-3P-WT
JH-M12-MDF11-4P-WT
JH-M12-MDF11-2+3P-WT
JH-M12-MDF11-6P-WT
JH-M12-MDF11-8P-WT

JH-Q12-MDF11-WT


Figure No.(图号)
JH-Q12-MDF11-2P-WT
JH-Q12-MDF11-3P-WT
JH-Q12-MDF11-4P-WT
JH-Q12-MDF11-2+3P-WT
JH-Q12-MDF11-6P-WT
JH-Q12-MDF11-8P-WT

PIN layout
(插针排列)



Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP66 / IP67
Operating temperature: -40 ~ 105°C
Molding cable diameter: 2~9mm


Plug with male PIN - Molding (公针插头-成型)

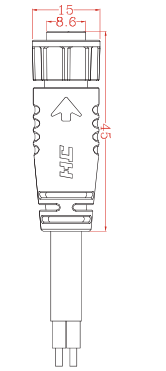

螺纹对接
Thread nut



快卡对接
Quick nut



螺纹对接
Thread nut



快卡对接
Quick nut

JH-M12-MDM11

Figure No.(图号)
JH-M12-MDM11-2P-X
JH-M12-MDM11-3P-X
JH-M12-MDM11-4P-X
JH-M12-MDM11-5P-X
JH-M12-MDM11-8P-X

JH-Q12-MDM11

Figure No.(图号)
JH-Q12-MDM11-2P-X
JH-Q12-MDM11-3P-X
JH-Q12-MDM11-4P-X
JH-Q12-MDM11-5P-X
JH-Q12-MDM11-8P-X


JH-M12-MDM11-WT

Figure No.(图号)
JH-M12-MDM11-2P-WT
JH-M12-MDM11-3P-WT
JH-M12-MDM11-4P-WT
JH-M12-MDM11-5P-WT
JH-M12-MDM11-8P-WT

JH-Q12-MDM11-WT

Figure No.(图号)
JH-Q12-MDM11-2P-WT
JH-Q12-MDM11-3P-WT
JH-Q12-MDM11-4P-WT
JH-Q12-MDM11-5P-WT
JH-Q12-MDM11-8P-WT





PIN layout
(插针排列)



简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP66 / IP67
工作温度: -40 ~ 105°C
注塑电缆直径: 2~9mm

JH-12 series

Docking socket with male PIN - Molding (公针对接插座-成型)

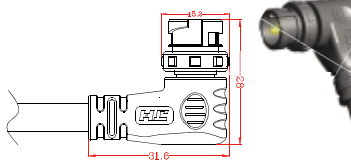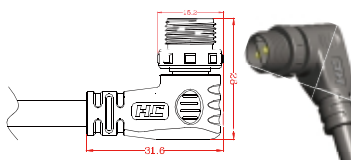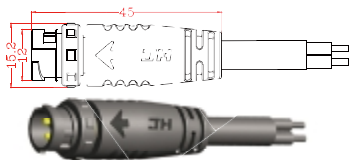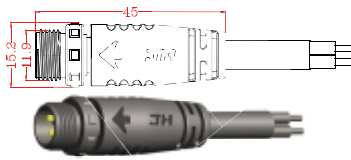

JH-M12-FDM11

Figure No.(图号)
JH-M12-FDM11-2P-X
JH-M12-FDM11-3P-X
JH-M12-FDM11-4P-X
JH-M12-FDM11-2+3P-X
JH-M12-FDM11-6P-X
JH-M12-FDM11-8P-X

JH-Q12-FDM11

Figure No.(图号)
JH-Q12-FDM11-2P-X
JH-Q12-FDM11-3P-X
JH-Q12-FDM11-4P-X
JH-Q12-FDM11-2+3P-X
JH-Q12-FDM11-6P-X
JH-Q12-FDM11-8P-X


JH-M12-FDM11-WT

Figure No.(图号)
JH-M12-FDM11-2P-WT
JH-M12-FDM11-3P-WT
JH-M12-FDM11-4P-WT
JH-M12-FDM11-2+3P-WT
JH-M12-FDM11-6P-WT
JH-M12-FDM11-8P-WT

JH-Q12-FDM11-WT





Figure No.(图号)
JH-Q12-FDM11-2P-WT
JH-Q12-FDM11-3P-WT
JH-Q12-FDM11-4P-WT
JH-Q12-FDM11-2+3P-WT
JH-Q12-FDM11-6P-WT
JH-Q12-FDM11-8P-WT

PIN layout
(插针排列)



Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP66 / IP67
Operating temperature: -40 ~ 105°C
Molding cable diameter: 2~9mm

Docking socket with female PIN - Molding (母针对接插座-成型)

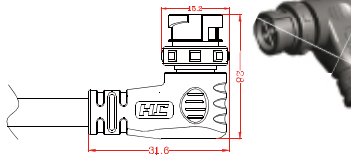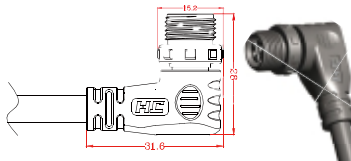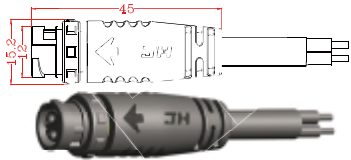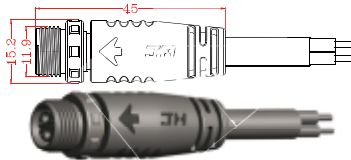

JH-M12-FDF11

Figure No.(图号)
JH-M12-FDF11-2P-X
JH-M12-FDF11-3P-X
JH-M12-FDF11-4P-X
JH-M12-FDF11-5P-X
JH-M12-FDF11-8P-X

JH-Q12-FDF11

Figure No.(图号)
JH-Q12-FDF11-2P-X
JH-Q12-FDF11-3P-X
JH-Q12-FDF11-4P-X
JH-Q12-FDF11-5P-X
JH-Q12-FDF11-8P-X


JH-M12-FDF11-WT

Figure No.(图号)
JH-M12-FDF11-2P-WT
JH-M12-FDF11-3P-WT
JH-M12-FDF11-4P-WT
JH-M12-FDF11-5P-WT
JH-M12-FDF11-8P-WT

JH-Q12-FDF11-WT

Figure No.(图号)
JH-Q12-FDF11-2P-WT
JH-Q12-FDF11-3P-WT
JH-Q12-FDF11-4P-WT
JH-Q12-FDF11-5P-WT
JH-Q12-FDF11-8P-WT

PIN layout
(插针排列)



简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP66 / IP67
工作温度: -40 ~ 105°C
注塑电缆直径: 2~9mm


JH-12 series

Front panel socket (前装面板插座)


JH-M12-FFM01



Figure No.(图号)
JH-M12-FFM01-2P-X
JH-M12-FFM01-3P-X
JH-M12-FFM01-4P-X
JH-M12-FFM01-2+3P-X
JH-M12-FFM01-6P-X
JH-M12-FFM01-8P-X

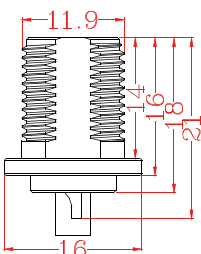

Regular style
常规款式
Mark: 01

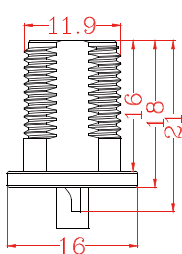


Extended style
加长款式
Mark: 02

JH-M12-FFF01




Figure No.(图号)
JH-M12-FFF01-2P-X
JH-M12-FFF01-3P-X
JH-M12-FFF01-4P-X
JH-M12-FFF01-5P-X
JH-M12-FFF01-8P-X

Panel cutout




Installation method

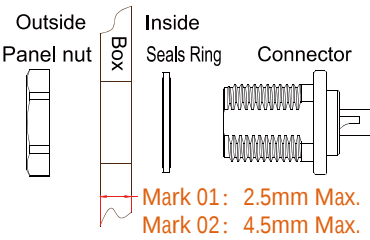


JH-M12-FFM01



Figure No.(图号)
JH-Q12-FFM01-2P-X
JH-Q12-FFM01-3P-X
JH-Q12-FFM01-4P-X
JH-Q12-FFM01-2+3P-X
JH-Q12-FFM01-6P-X
JH-Q12-FFM01-8P-X

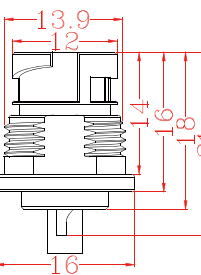

Regular style
常规款式
Mark: 01

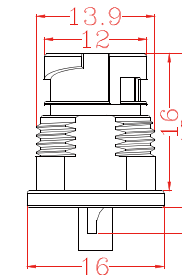


Extended style
加长款式
Mark: 02

JH-Q12-FFF01




Figure No.(图号)
JH-Q12-FFF01-2P-X
JH-Q12-FFF01-3P-X
JH-Q12-FFF01-4P-X
JH-Q12-FFF01-5P-X
JH-Q12-FFF01-8P-X

Panel cutout



Installation method

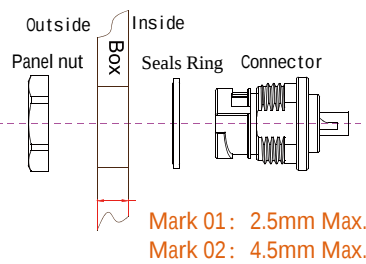


JH-12 series

Rear panel socket (后装面板插座)


JH-M12-FRM01




Figure No.(图号)
JH-M12-FRM01-2P-X
JH-M12-FRM01-3P-X
JH-M12-FRM01-4P-X
JH-M12-FRM01-2+3P-X
JH-M12-FRM01-6P-X
JH-M12-FRM01-8P-X



Panel cutout



Installation method



JH-M12-FRF01




Figure No.(图号)
JH-M12-FRF01-2P-X
JH-M12-FRF01-3P-X
JH-M12-FRF01-4P-X
JH-M12-FRF01-5P-X
JH-M12-FRF01-8P-X


JH-Q12-FRM01




Figure No.(图号)
JH-Q12-FRM01-2P-X
JH-Q12-FRM01-3P-X
JH-Q12-FRM01-4P-X
JH-Q12-FRM01-2+3P-X
JH-Q12-FRM01-6P-X
JH-Q12-FRM01-8P-X



Panel cutout



Installation method




JH-Q12-FRF01



Figure No.(图号)
JH-Q12-FRF01-2P-X
JH-Q12-FRF01-3P-X
JH-Q12-FRF01-4P-X
JH-Q12-FRF01-5P-X
JH-Q12-FRF01-8P-X

JH-12 series

Flange panel socket (法兰面板插座)

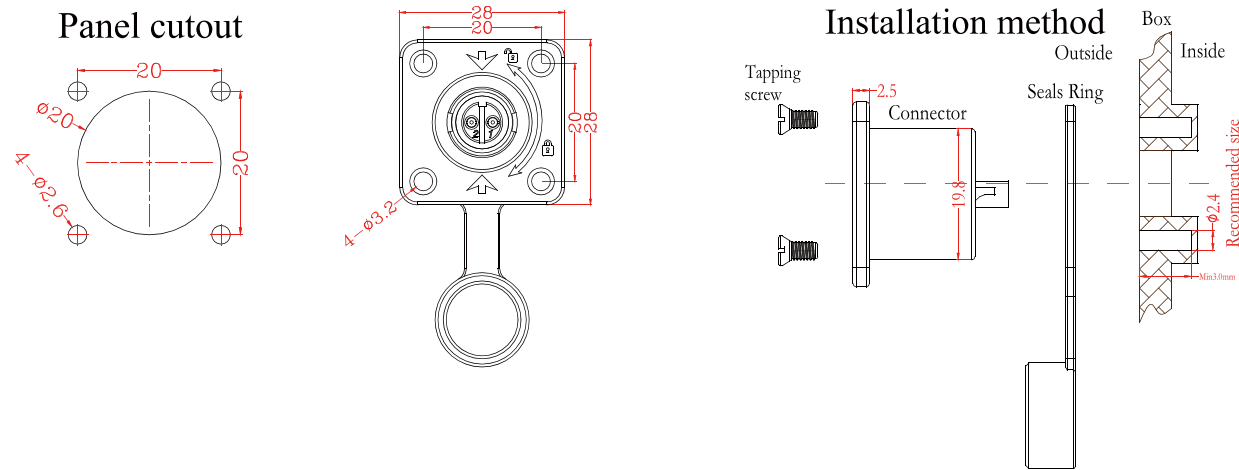


Flange socket with male PIN (公针法兰插座)



JH-F12-FRM02

Figure No.(图号)
JH-F12-FRM02-2P-X
JH-F12-FRM02-3P-X
JH-F12-FRM02-4P-X
JH-F12-FRM02-2+3P-X
JH-F12-FRM02-6P-X
JH-F12-FRM02-8P-X



Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / IP68
Operating temperature: -40 ~ 105℃

简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / IP68
工作温度: -40 ~ 105℃

Flange socket with female PIN (母针法兰插座)



JH-F12-FRF02

Figure No.(图号)
JH-F12-FRF02-2P-X
JH-F12-FRF02-3P-X
JH-F12-FRF02-4P-X
JH-F12-FRF02-5P-X
JH-F12-FRF02-8P-X

简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / IP68
工作温度: -40 ~ 105℃

JH-12 series

Extended products (延伸产品)

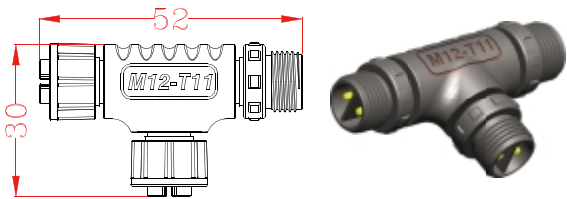
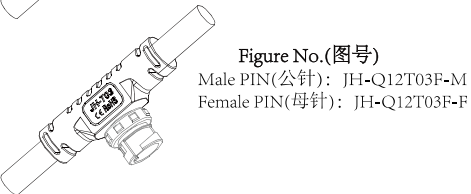
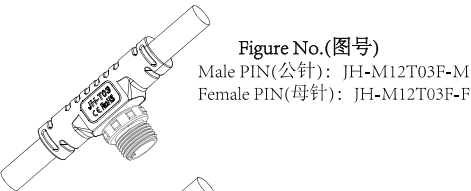

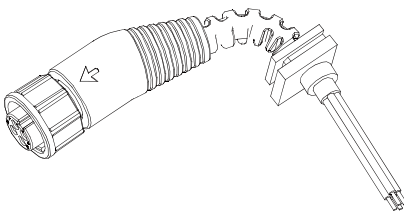




Figure No.(图号)
JH-M12-MDF12-2(.....)P
JH-Q12-MDF12-2(.....)P
JH-M12-MDM12-2(.....)P
JH-Q12-MDM12-2(.....)P
JH-M12-FDM12-2(.....)P
JH-Q12-FDM12-2(.....)P
JH-M12-FDF12-2(.....)P
JH-Q12-FDF12-2(.....)P

Figure No.(图号)
JH-M12-MDF13-2(.....)P
JH-Q12-MDF13-2(.....)P
JH-M12-MDM13-2(.....)P
JH-Q12-MDM13-2(.....)P
JH-M12-FDM13-2(.....)P
JH-Q12-FDM13-2(.....)P
JH-M12-FDF13-2(.....)P
JH-Q12-FDF13-2(.....)P

Figure No.(图号)
JH-M12-MDF13-2(.....)P
JH-Q12-MDF13-2(.....)P
JH-M12-MDM12-2(.....)P
JH-Q12-MDM12-2(.....)P



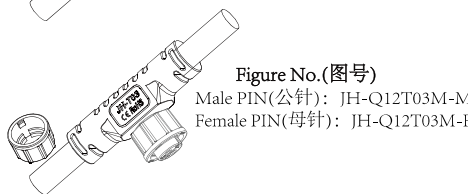


Figure No.(图号)
JH-M12-T11-XXX


JH-12 series

Waterproof cover (防水盖)

JH-M12-FDC01

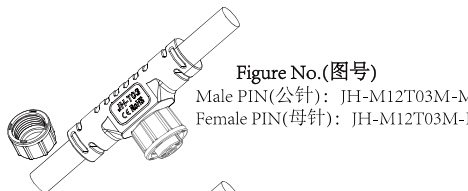


Schematic diagram of usage
安装示意图



JH-Q12 -FDC01




Schematic diagram of usage
安装示意图

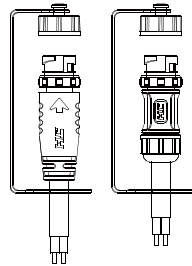

JH-M12 -MDC01




Schematic diagram of usage
安装示意图

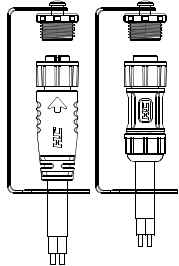


JH-Q12 -MDC01





Schematic diagram of usage
安装示意图

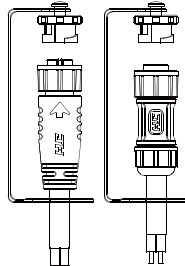

JH-M12-FRC01





Schematic diagram of usage
安装示意图

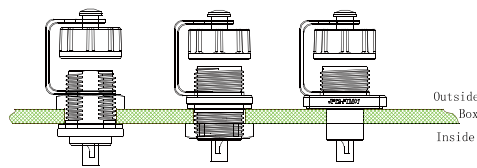

JH-Q12-FRC01



Schematic diagram of usage
安装示意图

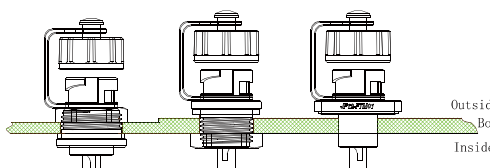

P20

